


TECHNICAL DATA SHEET

ELEKTRA SelfTec selfregulating heating cable

Construction

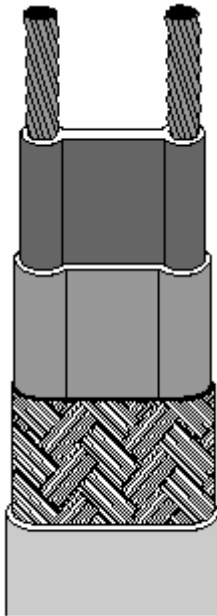

1. Core Cu 0,6 mm²
2. Selfregulating conductive core
3. Insulation made of modified polyolefin
4. Tinned copper braid
5. Modified polyolefin outer jacket

| | | |
|---------------------------------------|----------------|-------|
| Power output (W/m) at 5 °C | | 16 |
| Supply voltage (V) | | 230 |
| Minimum bending radius (mm) | | 10 |
| Maximum exposure temperature (°C) | Intermittent | 85 |
| | Continuous | 65 |
| Minimum installation temperature (°C) | | -20 |
| Maximum dimensions | Thickness (mm) | 6,0 |
| | Width (mm) | 8,5 |
| Outer jacket colour | | black |

Edition: 2.2005