


Probes

Temperature

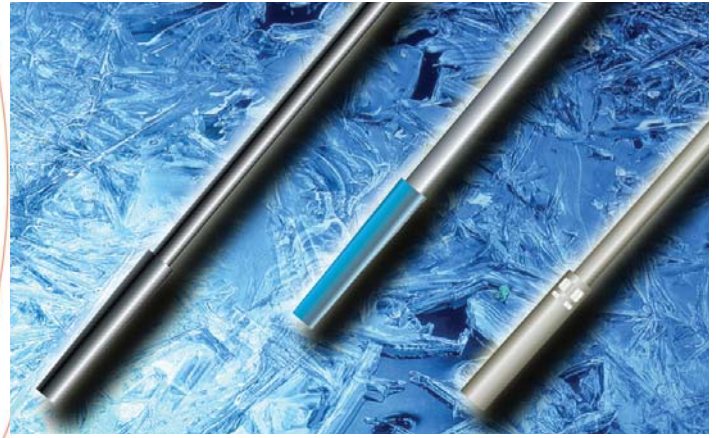

ST1K..C/P

Sensor type:	KTY81-121, 990 @ 25°C
Range:	-40÷105°C
Accuracy:	±1.5°C @ 25°C
Sheath:	Ø6x34mm; TPE
Cable:	2 wires x 0.35mm ² ; -40÷105°C; TPE; connector or points
Protection:	IP67

ST1L..P-

Sensor type:	KTY81-121, 990 @ 25°C
Range:	-40÷120°C
Accuracy:	±1.5°C @ 25°C
Sheath:	Ø6x34mm; TPE
Cable:	2 wires x 0.35mm ² ; screen; -40÷120°C; PETE; points
Protection:	IP67

ST1N..P-

Sensor type:	KTY81-121, 990 @ 25°C
Range:	-40÷120°C
Accuracy:	±1.5°C @ 25°C
Sheath:	Ø7x40mm; nylon6
Cable:	3 wires x 0.22mm ² ; screen; -40÷120°C; PETE; points
Protection:	IP67

SN2K..P

Sensor type:	NTC2K, 2000 @ 25°C
Range:	-40÷105°C
Accuracy:	±0.3°C @ 25°C
Sheath:	Ø6x34mm; TPE
Cable:	2 wires x 0.35mm ² ; -40÷105°C; TPE; points
Protection:	IP67

SN4K..P

Sensor type:	NTC10K, 10000 @ 25°C
Range:	-40÷105°C
Accuracy:	±0.3°C @ 25°C
Sheath:	Ø6x34mm; TPE
Cable:	2 wires x 0.35mm ² ; -40÷105°C; TPE; points
Protection:	IP67

SN4L..P-X

Sensor type:	NTC10K, 10000 @ 25°C
Range:	-40÷120°C
Accuracy:	±0.3°C @ 25°C
Sheath:	Ø6x70mm; stainless steel
Cable:	2 wires x 0.35mm ² ; -40÷120°C; TPE; points
Protection:	IP67